



Catalogue of Products

Filtration Fabrics & Drying Fabrics

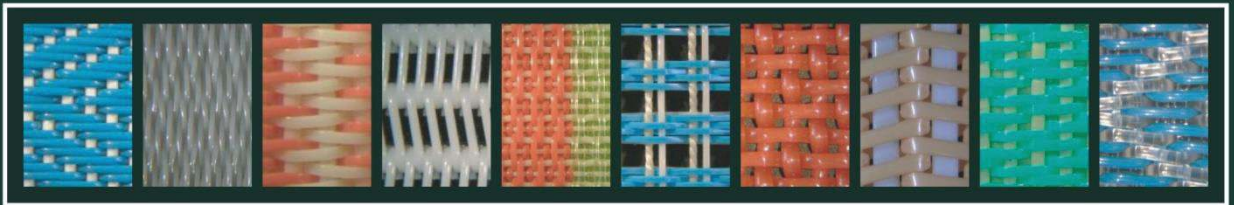


Filtration Fabrics - Overview

Fabrics FiltraPress

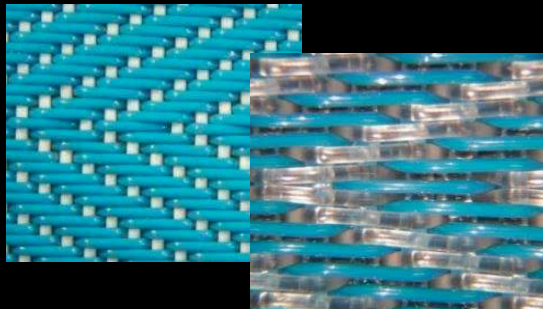


Heavy duty woven fabrics for pressing on belt filter presses (municipal and industrial sludge dewatering, mining industry, juice production etc.)

Spiral Fabrics

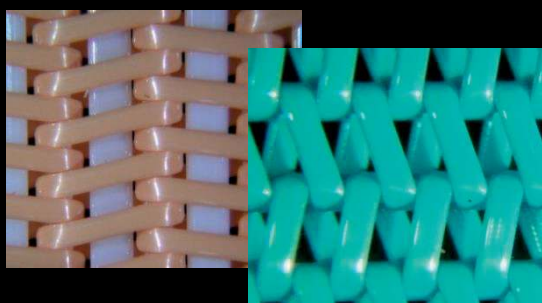


Fabrics are used for wide variety of applications – (dewatering on belt filter presses, conveyor belts, dryer belts etc.)

Fabrics FiltraDrain

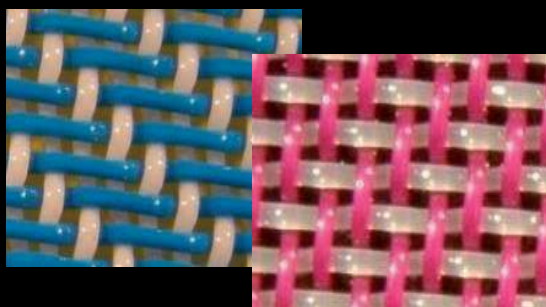

Single layer fabrics with high flow rate for thickening and filtration (gravity tables, drum filters, disk filters etc.)


Fabrics for Horizontal Vacuum Filter

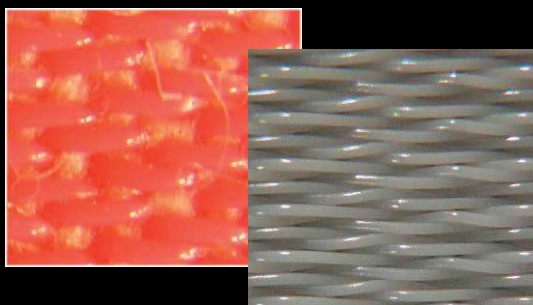

Fabrics for filtration of fines on horizontal vacuum filters (mining industry, FGD – plants)

Seams for Filtration Fabrics

Spiral seam

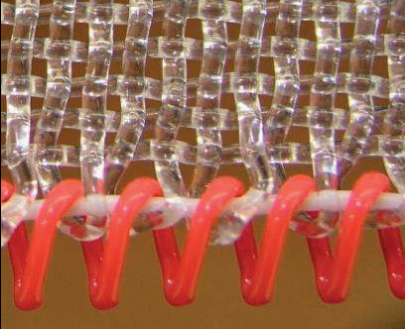


Advantages

High strength

For applications where metal seam can not be used

Warp loop seam

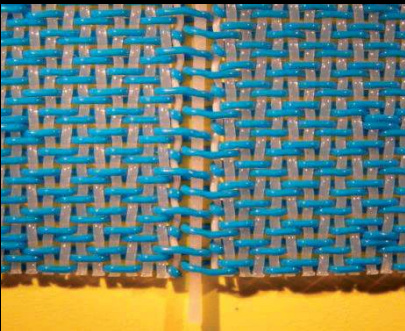

High strength

For applications where metal seam can not be used



Glued stainless steel clipper seam *(for belt press)*



Smooth seam edges

Quick and easy seaming



UltraDry J30

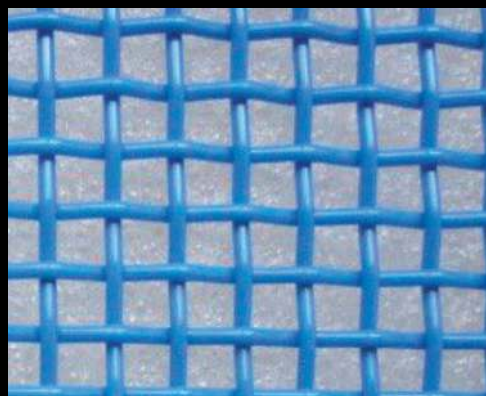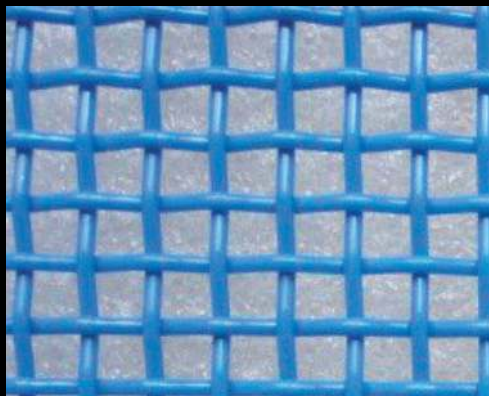

splot		plócienny
osnowa		1mm (PET odporny na hydrolizę)
wątek		1mm (PET odporny na hydrolizę)
rozmiar oczek	($\mu\text{m} \times \mu\text{m}$)	3000 x 3000
przepuszczalność powietrza	$\text{l/m}^2/\text{s}$ (200 Pa) CFM (125 Pa)	1,85
grubość	(mm)	602
waga	(g/m^2)	Szew tkany (taśma bez końca) Połączenie pierścieniowe

Tkanina do suszenia

FoodPro F20-43

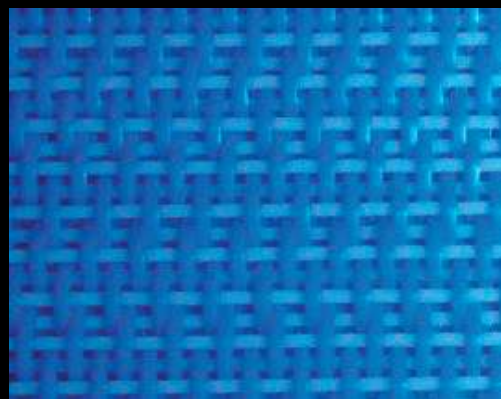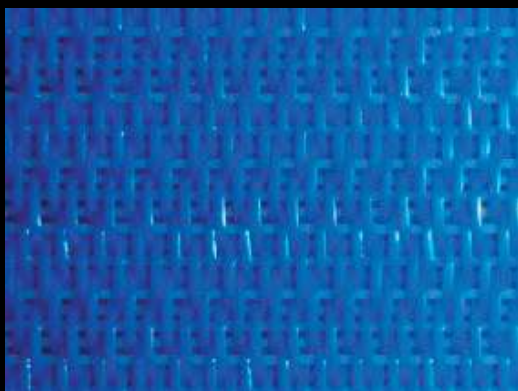

splot		5/3
osnowa		0,32 x 0,6 mm PET (płaski)
wątek		0,5 mm PET
ilość (osnowa)	(1/cm)	20,0
ilość (wątek)	(1/cm)	11,1
przepuszczalność powietrza	$l/m^2/s$ (200 Pa) CFM (125 Pa)	3200 - 4450 400 - 430
grubość	(mm)	1,45
waga	(g/m^2)	925
połączenie		Klejona nierdzewna Szew tkany (taśma bez końca) Połączenie pierścieniowe